

DTC-EXL DATA PRINT-OUT DIGITAL TORQUE WRENCHES

Newly designed, features a multi-function digital read-out.



PRINTER TPK-3
(Optional)

REPLACEABLE HEADS


Options

Included Accessory



FEATURES

- Accuracy : ±1% of indicated value +1 increment, over the full range
- Display : torque reading 4-digit LCD display
- Measurement modes : ①Peak hold ②Peak to peak-hold ③Run
- Direction of measurement : Automatic CW/CCW changeover, provided with CW/CCW status display
- Power supply : two rechargeable "AA" 1.2V batteries and a 100-240V battery charger
- Battery life : Approximately 20 hours with fully charged batteries (continuous operation)
- Power off : Auto power-off, approximately 3 minutes 40 seconds
- Tolerance setting : Automatic judgement capability per the Min/Max settings
- Data memory : 100 pieces of data
- Output : Printer output (exclusively to a TPK-3), analog output << 0 to 1.024 (mid point) to 2.048 V >>

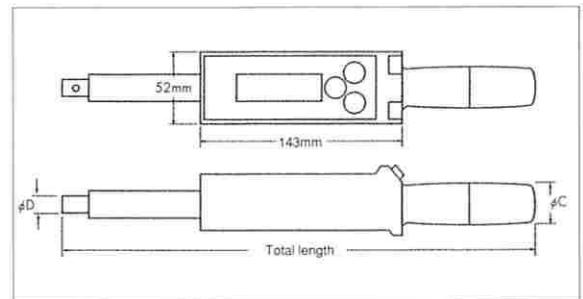

Model	Range (CW/CCW)	Increment	Total length (mm)	φ D (mm)	φ C (mm)	Weight (kg)	Accessory
DTC-100EXL	10~100 kgf.cm	0.1 kgf.cm	300	10	26	0.7	120 QCK
DTC-500EXL	50~500 kgf.cm	0.5 kgf.cm	324	12	26	0.7	450 QCK
DTC-1000EXL	100~1000 kgf.cm	1 kgf.cm	365	15	32	0.8	900 QCK
DTC-2000EXL	200~2000 kgf.cm	1 kgf.cm	380	18	32	0.9	1800 QCK
DTC-3000EXL	3~30 kgf.m	0.02 kgf.m	535	22	32	1.5	2800 QCK
DTC-5000EXL	5~50 kgf.m	0.05 kgf.m	1,063	30	34	3.9	7000 QCK
DTC-10000EXL	10~100 kgf.m	0.1 kgf.m	1,417	34	34	7.3	10000 QCK
DTC-N10EXL	1~10 N.m	0.01 N.m	300	10	26	0.7	120 QCK
DTC-N50EXL	5~50 N.m	0.05 N.m	324	12	26	0.7	450 QCK
DTC-N100EXL	10~100 N.m	0.1 N.m	365	15	32	0.8	900 QCK
DTC-N200EXL	20~200 N.m	0.1 N.m	380	18	32	0.9	1800 QCK
DTC-N300EXL	30~300 N.m	0.2 N.m	535	22	32	1.5	2800 QCK
DTC-N500EXL	50~500 N.m	0.5 N.m	1,063	30	34	3.9	7000 QCK
DTC-N1000EXL	100~1000 N.m	1 N.m	1,417	34	34	7.3	10000 QCK
DTC-PI80EXL	8~80 lbf.in	0.01 lbf.in	300	10	26	0.7	120 QCK
DTC-PI400EXL	40~400 lbf.in	0.1 lbf.in	324	12	26	0.7	450 QCK
DTC-PI800EXL	80~800 lbf.in	0.1 lbf.in	365	15	32	0.8	900 QCK
DTC-PF100EXL	10~100 lbf.ft	0.1 lbf.ft	380	18	32	0.9	1800 QCK
DTC-PF200EXL	20~200 lbf.ft	0.1 lbf.ft	535	22	32	1.5	2800 QCK
DTC-PF400EXL	40~400 lbf.ft	0.2 lbf.ft	1,063	30	34	3.9	7000 QCK
DTC-PF800EXL	80~800 lbf.ft	1 lbf.ft	1,417	34	34	7.3	10000 QCK